

Floor/Underceiling **Air Conditioners**




Universal Type
R22
10kw to 18kw

 **DUNNAIR**
(Aust) Pty Ltd

Floor Ceiling Console

Model	Indoor		GFU-36R	GFU-48R	GFU-60R
	Outdoor		LCU-36R	LCU-48R	LCU-60R
Capacity	Cooling (kW)		10.49	13.98	17.58
Capacity	Heating (kW)		10.70	14.19	17.69
Power Input	Cooling (kW)		3.65	5.56	6.62
	Heating (kW)		3.59	5.53	6.59
Running Current	Cooling (A)		17.46	8.45	10.06
	Heating (A)		17.18	8.40	10.01
Indoor	Power Source	Va.c./Hz/ph	220-240/50/1	380-420/50/3	
	Fan	Air Flow (m3/h)	1970	2582	3058
		Noise (dBA)	41	44	46
	Dimension	DxWxH mm	199x1250x645	199x1750x645	
	Weight	Net Weight kg	40	60	62
		Gross Weight kg	45	65	66
Outdoor	Power Source	V/Ph/Hz	220-240/50/1	380-420/50/3	
	Compressor Type		Rotary	Scroll	
	Fan	Air Flow (m3/h)	3398	4077	6116
		Noise (dBA)	52	54	56
	Dimension	DxWxH mm	400x970x795	400x976x1050	400x976x1250
	Weight	Net Weight kg	79	98	110
		Gross Weight kg	86	106	118
Refrigeration type		R22	R22	R22	
Liquid Pipe	mm. (inch)	9.52 (3/8)	12.7 (1/2)	12.7 (1/2)	
Gas Pipe	mm. (inch)	15.88 (5/8)	19.05 (3/4)	19.05 (3/4)	

- Note.
1. The nominal cooling capacity and electrical characteristics are based on ARI standard 27°C DB, 19°C WB indoor temp and 35°C DB outdoor temp at high speed.
 2. The nominal heating capacity and electrical characteristics are based on ARI standard 20°C DB, indoor temp and 7°C DB, 6°C WB outdoor temp high speed.
 3. Due to continuing research in energy saving technology, design and specifications are subject to change without notice.

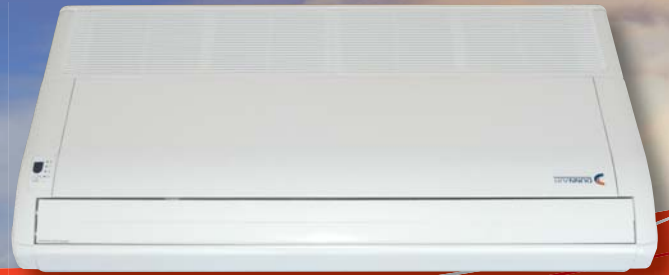

Floor Ceiling Consoles

Indoor Features

- > Ultra quiet operation
- > Modern style in attractive colour
- > Efficient cooling and heating
- > Air Filters
- > Auto swing louver

Remote Control

- > Infrared remote control
- > LCD Display
- > Auto restart at the last function setting
- > 3 fan speeds plus auto-fan
- > Cool, heat, dry and fan only modes
- > Sleep function
- > Anti-frost control
- > Random Start
- > 12 hours timing programming

Double Auto Swing

Three-dimensional air direction control is possible through a combination of up/down and right/left air direction swing. Since up/down air direction louvers operate automatically according to the operating mode of the unit, it is possible to set air direction based on the operating mode.



10 Cochranes Road, Moorabbin Victoria 3189 Australia
 Phone: 03 8552 1250 Facsimile: 03 8552 1201
 Email: sales@dunnair.com.au Website: www.dunnair.com.au

Universal Type
 R22
 10kw to 18kw